

Reasons to buy

- Increased production output
- Consistent mold release
- Scratch and scuff resistance

IncroMold™

Enhancing your molding process



CRODA
Polymer Additives

At the heart of better plastics

Enhancing your molding process

IncroMold™ is a range of internal mold release additives designed to improve your injection molding process. IncroMolds work at the surface of the molded part to reduce friction, allowing more efficient processing and improved part quality time after time.

IncroMolds deliver enhanced surface finish of molded articles, leading to less rejects and cost saving.

Key benefits

- Consistent mold release
- Reduced cycle times
- Continuous running
- Scratch and scuff resistance
- Improved flow and dispersion of filled polymers
- Improved surface finish
- Fewer rejects and waste
- Reduced machine wear and cleaning
- Improved pigment dispersion

Product selection

The system processing temperature and polarity of the polymer will determine which grade of IncroMold is the most suitable. IncroMolds are available as 100 % active beads for direct addition into the polymer melt or to be dosed via a masterbatch. Addition levels of 0.5 % are recommended initially and then levels can be optimised between 0.2 and 1.0 % depending on the desired effect.



Figure 1: Comparison of quality of injection molded part with and without IncroMold

Product Name	Physical form @25 °C	Suggested polymer	Temperature range	Suggested application
IncroMold F	Bead	Polyolefins, especially PE	Up to 230 °C	Recommended when fast acting mold release is required
IncroMold S	Bead	Polyolefins, especially PP	Up to 280 °C	Recommended for excellent mold release
IncroMold K	Bead	PP and polar polymers such as Ionomers	Up to and above 280 °C	Recommended when reduced scratch visibility is required
IncroMold T	Bead	PA	Up to and above 280 °C	Recommended for molding at high temperatures



Mold release force

IncroMolds are easy to use additives that can be added directly to the polymer melt prior to molding. As the polymer cools, IncroMold rapidly migrates to the surface of the polymer, reducing the adhesion between the part and the mold, improving the release from the molding tool. IncroMold can reduce mold release force by up to 38 %, leading to improved process efficiency and less wear on machine parts.

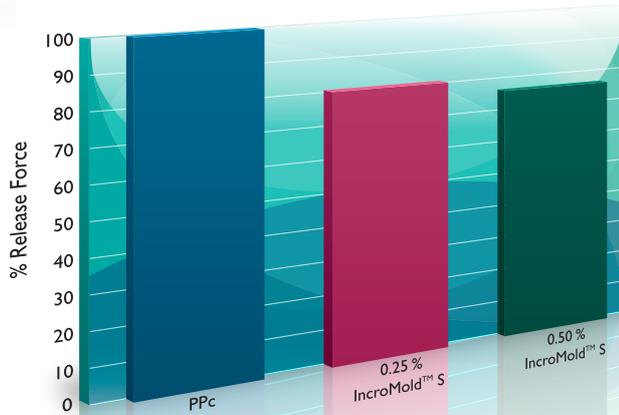


Figure 2: Comparison of mold release force in PPc with and without IncroMold S

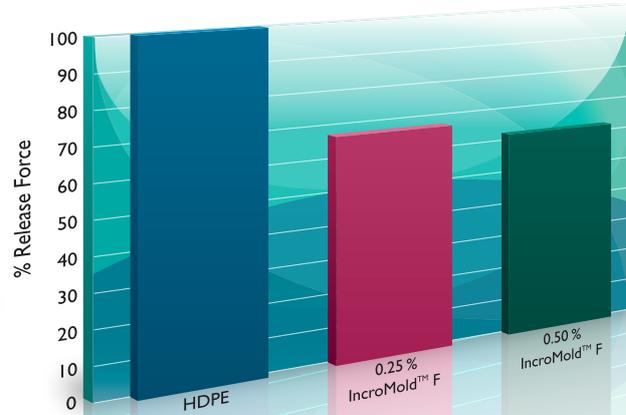


Figure 3: Comparison of mold release force in HDPE with and without IncroMold F

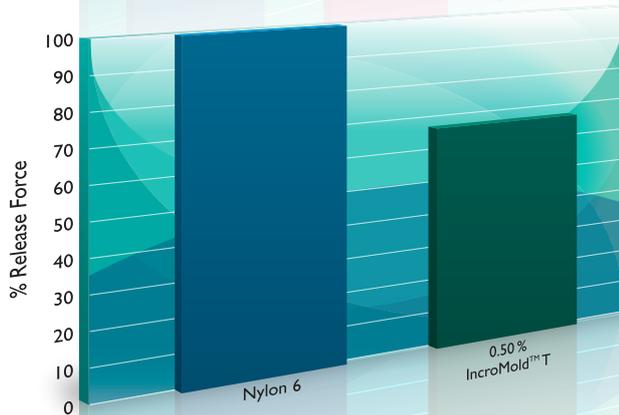


Fig 4: Comparison of mold release force in Nylon 6 with and without IncroMold T

Reduced cycle times

IncroMolds can improve polymer flow, leading to easier mold filling and allowing injection at lower temperatures and speeds. This in turn allows reduced cooling time in the mold and a reduction in cycle time. IncroMolds have shown improvements of over 20 % in the number of shots per hour, increasing output and maximising profits.

Reduced machine wear and tear

IncroMolds can reduce the wear and tear on machinery by improving polymer flow in the process. This will help to increase the lifetime of the machinery and save money.

Post-molding benefits

IncroMold can also provide many post-molding benefits including lower torque release, improved de-nesting, reduction in assembly force, improved pigment dispersion and a reduction in the number of rejects.

Case Study

IncroMold S for Cost Reduction in PP

A manufacturer of polypropylene parts for electric showers approached Croda wanting to increase production output and save costs. They were producing 71 shots per hour but had to use silicone spray as a mold release agent. The silicone spray was applied inconsistently and was difficult to remove from the surface of finished parts, resulting in a sticky residue on the part.

Croda recommended using IncroMold S at 0.5 % to eliminate the use of silicone and allow continuous production. The customer found that they were able to produce 82 shots per hour, (an increase of 15 %) as well as reduce cycle time from 55 to 44 seconds, (an improvement of 20 %). By using IncroMold S, the customer observed that the improvement in mold release also resulted in more consistent quality parts, less rejects and a reduction in pin marks.

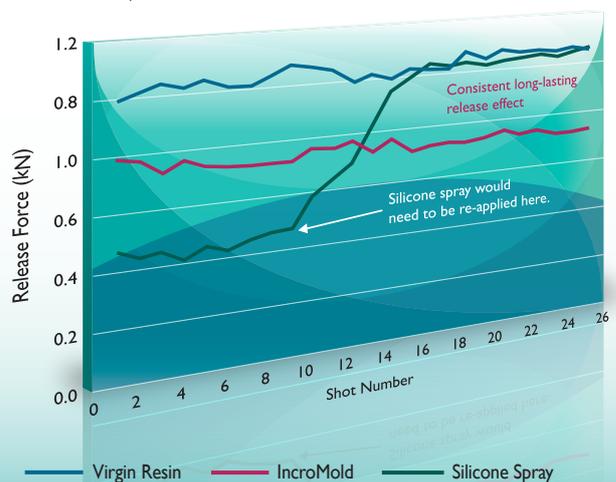


Figure 5: Mold release force of blank polymer resin compared with IncroMold additive and silicone spray.

Scratch resistance

Polymers naturally exhibit high friction which can lead to scratching and scuffing in the molded part. Scratch and scuff resistance is important to maintain a high quality look, especially in automotive parts such as dashboards and door panels.

IncroMold K is ideally suited to improving scratch width and appearance by reducing the friction at the polymer surface, particularly in PP copolymers.

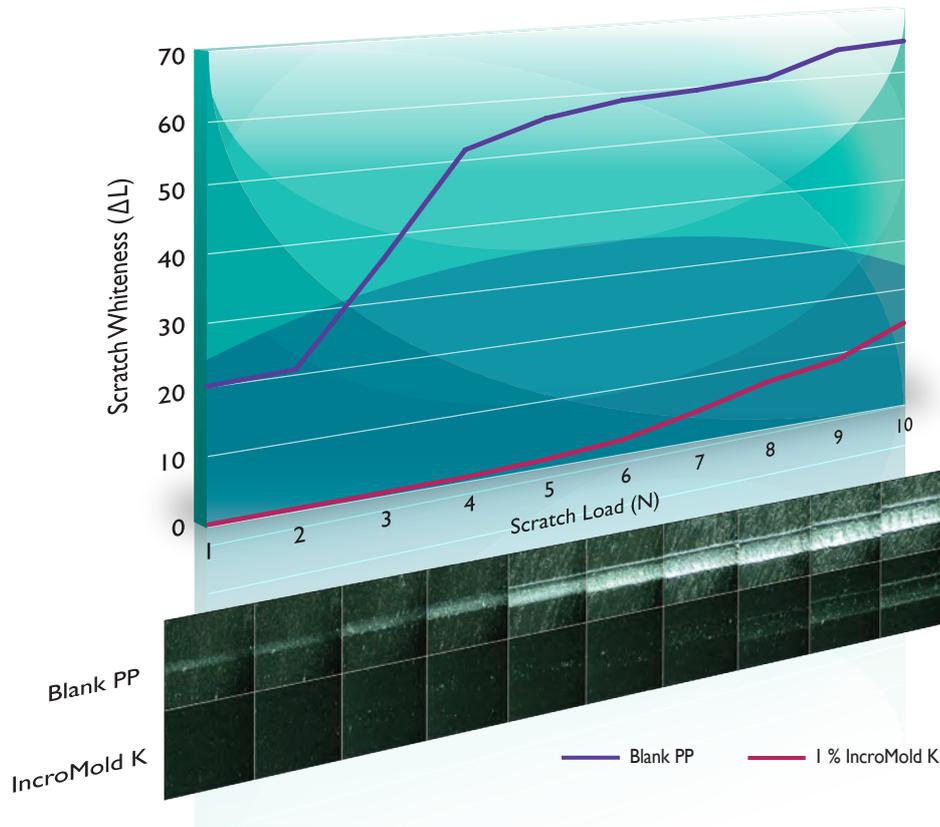


Figure 6: Comparison of scratch whiteness in plaques with and without IncroMold K at various loadings

If you would like more information about which anti-scratch additive will work best in your polymer formulation, please contact your local sales representative or visit www.crodapolymeradditives.com

Further information

Croda sales and distribution are coordinated through an extensive worldwide network of associates and agents. For details of your local representative please contact your nearest Croda regional office. Visit our global website at www.crodapolymeradditives.com

Croda Europe Ltd

Tel +44 1405 860551
pa-europe@croda.com

Croda Singapore

Tel +65 65519600
pa-asia@croda.com

Croda Brasil

Tel +55 19 3765 3500
marketinglatam@croda.com

Croda Inc, USA

Tel +1 732 417 0800
pa-northamerica@croda.com

Non-warranty:

The information in this publication is believed to be accurate and is given in good faith, but no representation or warranty as to its completeness or accuracy is made. Suggestions for uses or applications are only opinions. Users are responsible for determining the suitability of these products for their own particular purpose. No representation or warranty, expressed or implied, is made with respect to information or products including, without limitation, warranties of merchantability, fitness for a particular purpose, non-infringement of any third party patent or other intellectual property rights including, without limit, copyright, trademark and designs. Any trademarks identified herein are trademarks of the Croda group of companies.

©2014 Croda Europe Ltd

10/14 PAMB016v01